


Indicating Pressure Switches

- Notes:**
- 1) Electrical contact assembly is not offered in flameproof version.
 - 2) Contact assembly is offered only in diecast aluminium case.
 - 3) Flameproof version available only in diecast aluminium case & with microswitch with 100 mm dial size only.
 - 4) Non-ferrous system is recommended up to 40 kg/cm²
 - 5) Pressure switch can also be offered with chemical seal pressure gauges in weatherproof and flameproof cases.
 - 6) Surface mounted flameproof housing with chemical seal pressure gauge is available with capillary.



Benefits of Microswitch type over contact assembly


- Microswitch is rated 5 amp @ 230 VAC (3A @ 28 VDC). Hence use of relay is not required
- Microswitch offered as a combination of movement and switch is procured from Internationally reputed vendor.
- Microswitch assembly provides better switching accuracy and repeatability
- Compact design.

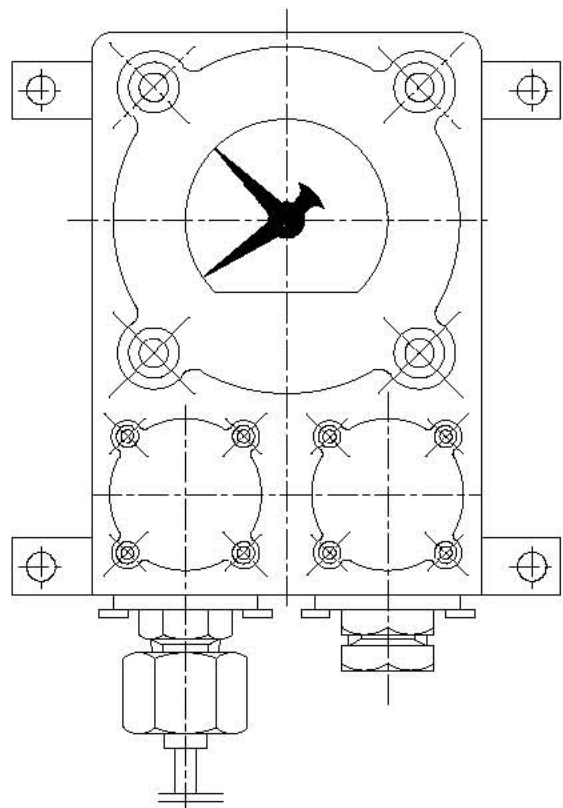

Indicating Pressure Switches

How to Order

TYPE : IPS

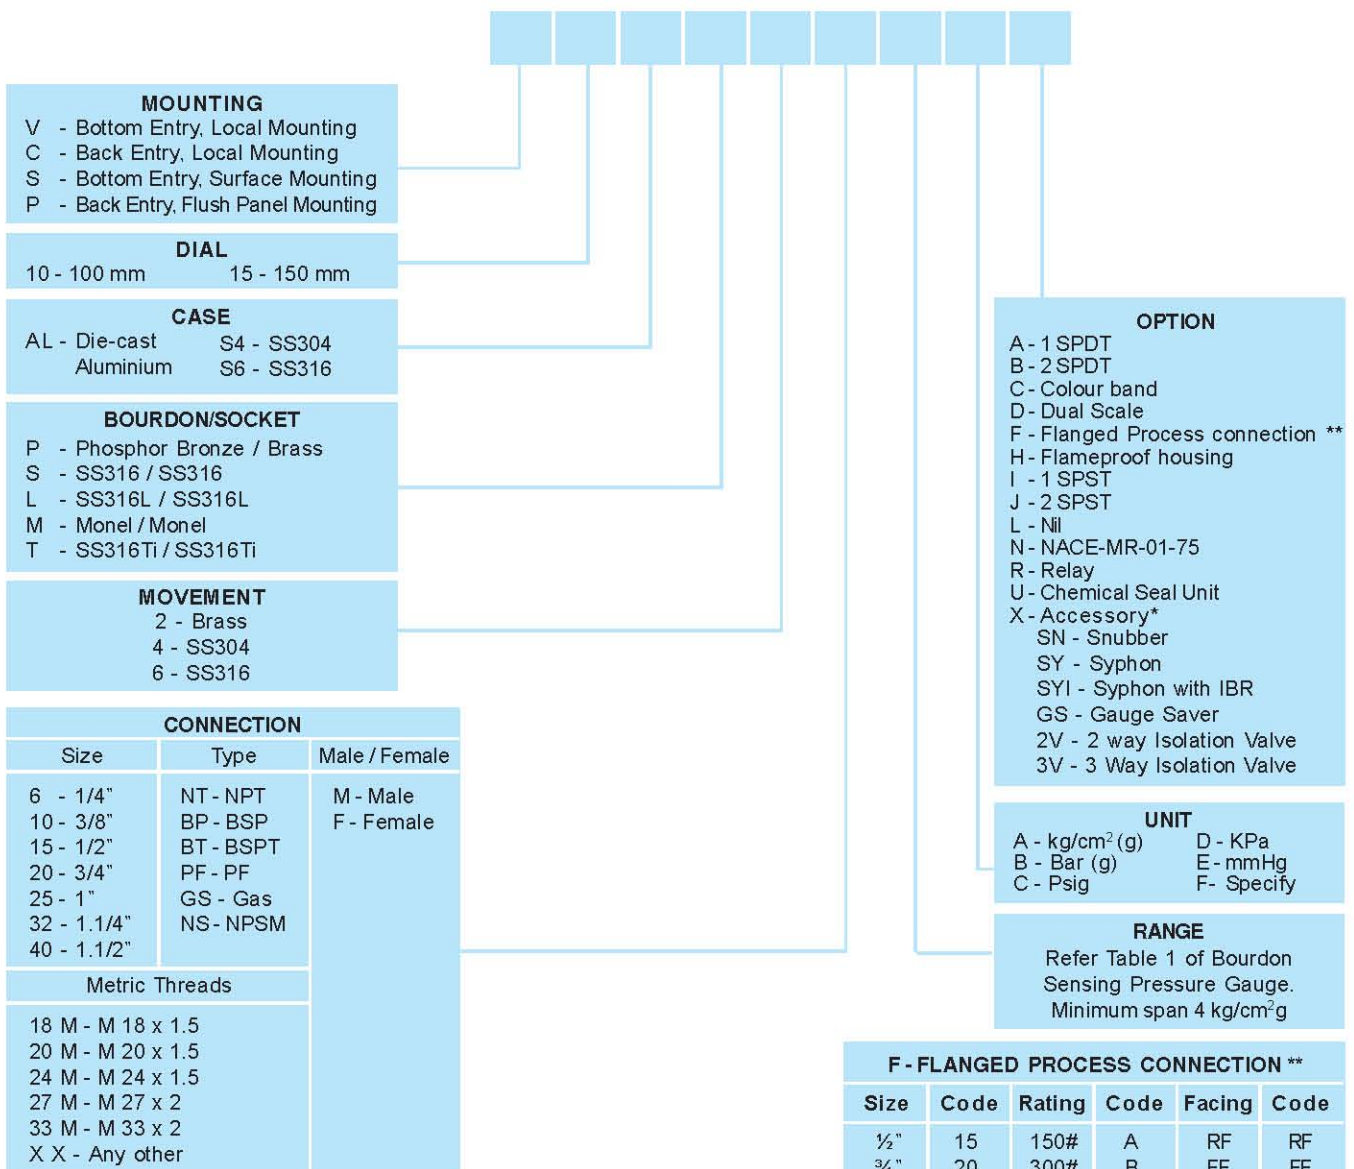

** For Flanged Process Connection refer the above table (mentioned separately)

* Specify material & size in the bracket e.g. SY [CS, 1/2" NPT(F) x 1/2" NPT(M)]

Note : Liquid filled case not available with this construction / model